


#### Submitted Model No.:

#### Specific Features:

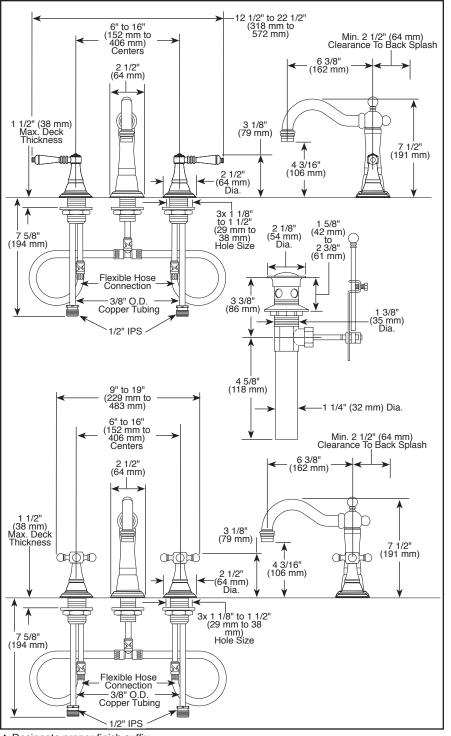

Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability. BSP-L-65336LF Rev. G

# BRIZO

## BATHROOM FAUCET

- Tresa<sup>®</sup> Collection
- Two Handle Widespread Deck Mount

#### **FEATURES:**

Quick-Snap<sup>®</sup> Installation

#### **STANDARD SPECIFICATIONS:**

- Max flow rate 1.5 qpm @ 60 psi, 5.68 L/min @ 414 kPa
- Max flow rate (ECO models only) 1.2 gpm @ 60 psi,
- 4.54 L/min @ 414 kPa
- Three hole mount
- Ceramic cartridge Hot and cold stems are interchangeable
- 1/4 turn handle stops
- Standard mounting deck thickness can be extended
- 1" (25 mm) with RP10612

### WARRANTY

- · Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2 Indicates compliance to ICC/ANSI A117.1 Valve control only
- EPA WaterSense<sup>®</sup>
- Verified compliant with 0.25% weighted average Pb content regulations.

#### Brizo Kitchen & Bath Company

55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2020 Brizo Kitchen & Bath Company