

FEATURES

- Solid metal construction for durability and reliability
- Allows bather to set precise temperature
- Patented K-joint installation ensures constant trim appearance, regardless of variability in valve rough-in
- Complements the Script collection


CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:



- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- ADA*
- OBC* (Lever only)
- CSA B651* (Lever only)

* Compliant when installed to the specific requirement of this regulation


P25022

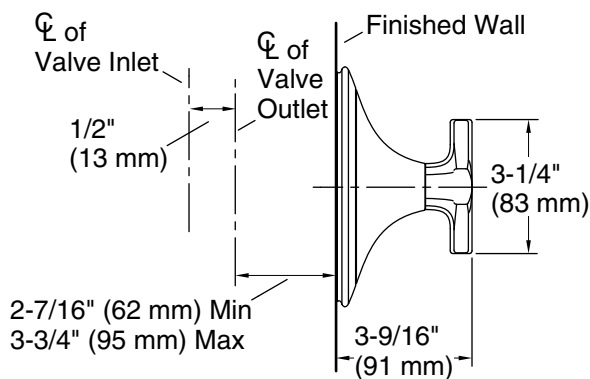

P25022-CR

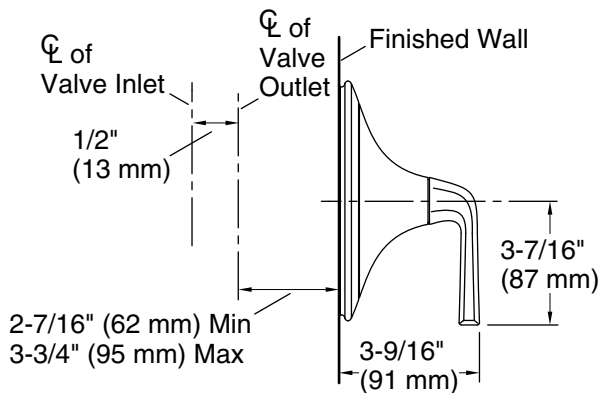

P25022-LV



SPECIFIED MODEL

| Model | Description | Finishes | | |
|-------------------|--|---|---|---|
| P25022-CR | Script Thermostatic Trim, Cross Handle | <input type="checkbox"/> CP Polished Chrome | <input type="checkbox"/> AD Nickel Silver | <input type="checkbox"/> BCH Blush Bronze |
| P25022-LV | Script Thermostatic Trim, Lever Handle | <input type="checkbox"/> CP Polished Chrome | <input type="checkbox"/> AD Nickel Silver | <input type="checkbox"/> BCH Blush Bronze |
| Required Rough-in | | | | |
| P29511-WS | 1/2" Thermostatic Mixing Valve | <input type="checkbox"/> N/A | | |
| P29512-WS | 3/4" Thermostatic Mixing Valve | <input type="checkbox"/> N/A | | |

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.